


NWA

APEXRIDGE®

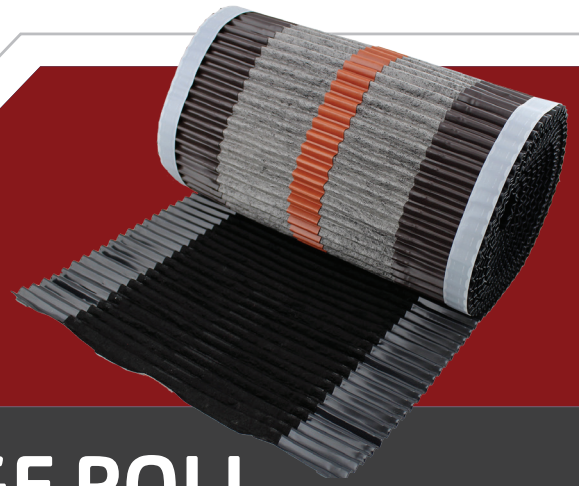

X-STRONG RIDGE ROLL

RRXS01

TECHNICAL DATA SHEET

Product Details

RRXS01

Strong Roll X-Strong is an innovative product that introduces to the global construction market an innovative solution in the application of the ridge tape.

Thanks to its specific structure extensibility of the whole strip reaches 40% and by using a two-layer fabric PP + PE 138g/m² we have obtained

long-term weather resistance.


Innovative production technology allows us to continuously improve products and meet the expectations of our customers.

Strong Roll X-Strong is one of many innovative products from X-tream group.

Features & Benefits

Code:	RRXS01
Width:	310mm
Aluminium thickness:	140 μ
UV stabilisation:	Yes
Density of butyl glue:	1,7 g/m ²
Material:	Polypropylene (PP) + Polyethylene (PE)
Air permeability:	270 g/m ²
Width butyl glue:	25 mm +/- 1 mm
Min. installation temp:	+ 5 °C
Temperature resistance:	- 30 °C to + 80 °C
Water permeability:	3g/m ² /24h
Stretchability:	40%

NWA
G R O U P



Irl. Office: Keenaghan, Kilmacrenan, Letterkenny,
Co. Donegal, Ireland. F92 DW64

T. +353 (0)74 91 39500 F. +353 (0)74 91 39519

E. info@nwa.ie W. www.nwa.ie