



C08TS/T/TL TILE DRY VERGE

TECHNICAL DATASHEET

The Kytun Tile Dry Verge System permanently secures tiles on gable ends and gives an attractive maintenance free finish to the roofline.

The design helps protect the edge of the roof from the elements and eliminates the possibility of lifting and damage to the roof underlay. No mortar or timber guides are required.


All our bespoke dry verge is manufactured from 0.7mm high grade Aluminium.

Compatibility

45mm Version: Suitable for a maximum individual tile thickness of 20mm

55mm Version: Suitable for a maximum individual tile thickness of 25mm

65mm Version: Suitable for a maximum individual tile thickness of 30mm

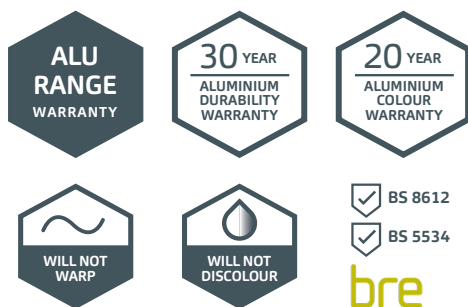

C08TS/T/TL TILE DRY VERGE

TECHNICAL DATA SHEET

Product Features

- Provides full wind uplift and rain protection.
- Extremely easy and quick to install.
- Requires no maintenance once installed.
- Can be fully customised.
- Available in a range of colours:
Black, Blue/Black, Brown & White.
- Powder coated colours also available on request.

Dimensions

C08TS/C08T/C08TL Aluminium

Overall length: 2400mm & 3000mm

Code	Size	Colour	Pk Qty
C08TS	45mm x 2.4m/3m	Blk • Blue/Blk • Brwn • Wht	4
C08T	55mm x 2.4m/3m	Blk • Blue/Blk • Brwn • Wht	4
C08TL	65mm x 2.4m/3m	Blk • Blue/Blk • Brwn • Wht	4
C08TSJ	45mm x 2.4m/3m	Blk • Blue/Blk • Brwn • Wht	1
C08TJ	55mm x 2.4m/3m	Blk • Blue/Blk • Brwn • Wht	1
C08TLJ	65mm x 2.4m/3m	Blk • Blue/Blk • Brwn • Wht	1

Suitable for brick, render & bargeboard construction.

45mm Version: Suitable for a maximum individual tile thickness of 20mm.

55mm Version: Suitable for a maximum individual tile thickness of 25mm.

65mm Version: Suitable for a maximum individual tile thickness of 32mm.

Compatibility

Suitable for brick, render and bargeboard construction. For correct sizing for your tile requirements please contact our Technical Department.

